


VISUAL APPROACH CHART - ICAO

AD ELEV 46 ft

APP	120.3
TWR	126.025
	118.45
	270.4

SINGAPORE/SELETAR

RWY 21

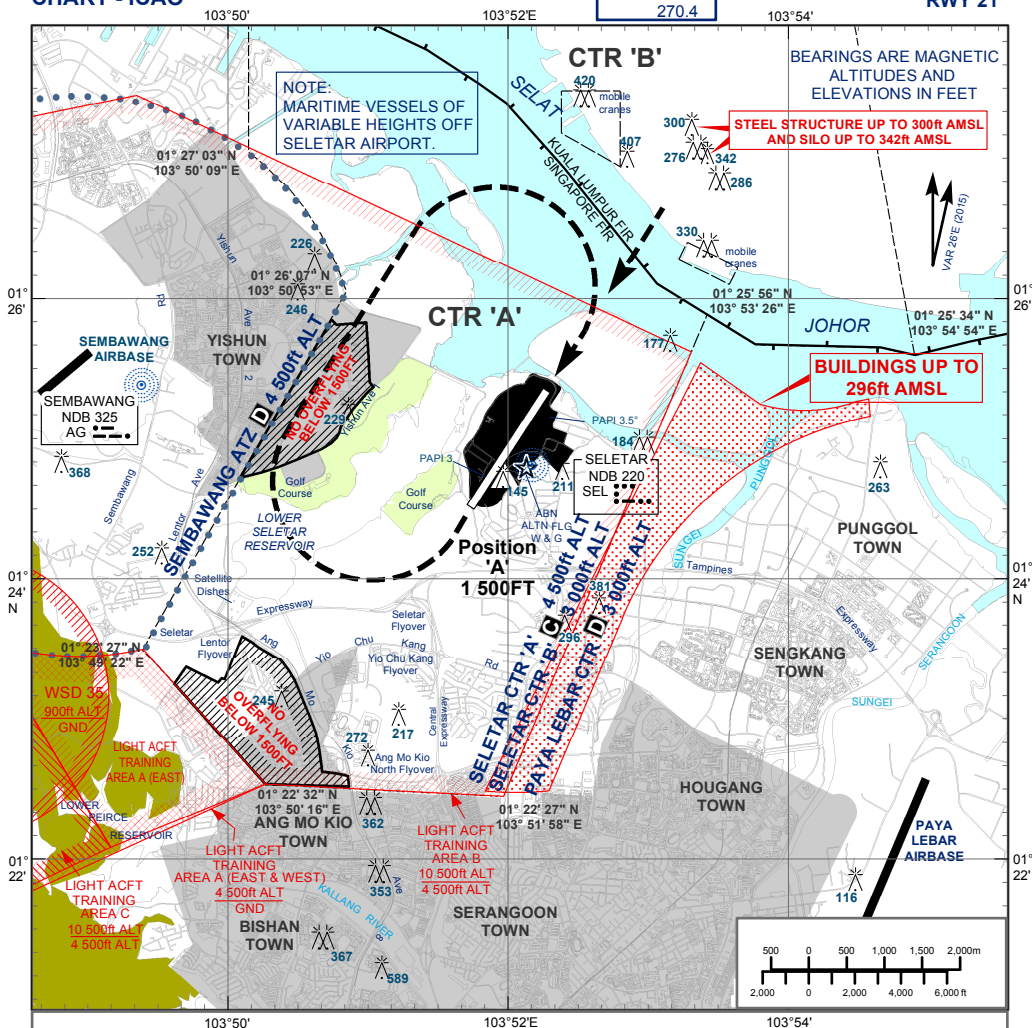

ADVISORY JOINING PROCEDURES FROM JB AND KK - RWY 21


Straight-in Approach

- 1) Join direct for a visual approach Runway 21, descending from 2 000ft at a speed of not more than 170kt, or as cleared by ATC. Pilots should have runway in sight.
- 2) Joining aircraft shall give way to circuit traffic already on downwind.

Circling Approach

- 1) Overfly the runway at 2 000ft at a speed of not more than 160kt.
- 2) When passing over position 'A', descend from 2 000ft to 1 500ft and turn right for downwind Runway 21. At downwind, descend for a visual approach or as cleared by ATC. Pilots should have the runway in sight.
- 3) Joining aircraft shall give way to circuit traffic already on downwind.

CAUTION

- a) Pilots are required to keep clear of Sembawang ATZ and Paya Lebar CTR. Turns should therefore be kept within Seletar CTR.
- b) Pilots should not fly to the east of the runway. This is to keep clear of tall buildings up to 296ft AMSL there. Pilots should have all relevant obstructions in sight, including the steel structure 300ft AMSL and the Silo 342ft AMSL 2nm north of the airfield.
- c)  Built-up residential areas - No overflying below 1 500ft. Aircraft types which are unable to safely manoeuvre clear of the restricted areas are not allowed to operate at Seletar Airport.

Pilot's eye height over the threshold when the following PAPI lights come into view	PAPI 3.5° RUNWAY	
	03	21
2 white lights and 2 red lights (MEHT)*	17.720m	17.720m
3 white lights and 1 red light	20.323m	19.286m
4 white lights	22.927m	20.871m

*MEHT : Minimum Eye Height Over the Threshold.

Note : Aircraft with eye-to-wheel height greater than 6.3 metres are advised to fly with 2 white and 2 red lights visible so as to achieve sufficient wheel clearance.