


VISUAL APPROACH CHART - ICAO

AD ELEV 46 ft

ATIS AP ID-WSSL
128.425

APP	124.05
	126.025
TWR	118.45
	270.4

SINGAPORE/SELETAR RWY 03

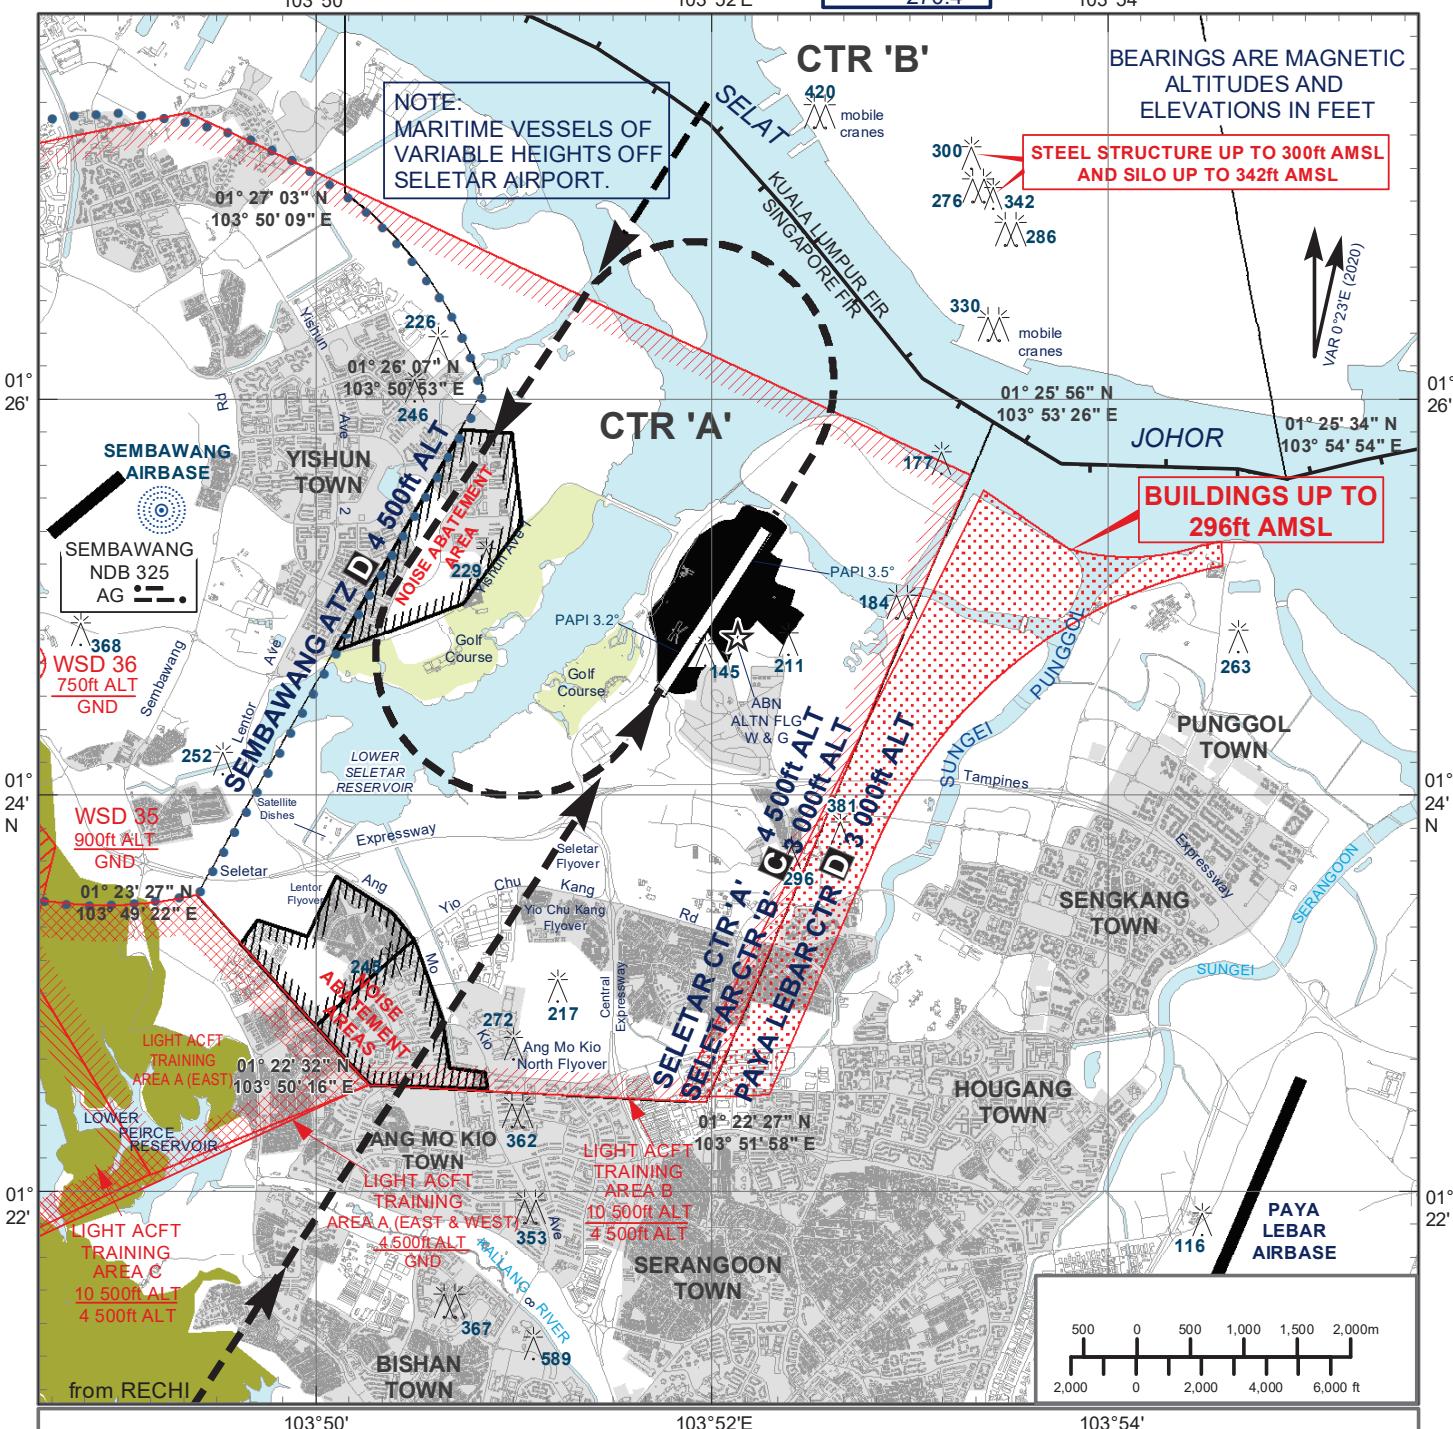

103-30
ADVISORY JOINING PROCEDURES - RWY 03

Straight-in Approach

- 1) From GUMPU or OMKOM, join left downwind at 2 000ft, or as directed by ATC, at a speed of not more than 170kt. When downwind, descend from 2 000ft for visual approach or as cleared by ATC. Pilots should have runway in sight. Aircraft shall give way to circuit traffic already on downwind.
- 2) From SJ-PONJO-RECHI, join direct for visual approach, descending from 2 000ft at a speed of not more than 170kt, or as cleared by ATC. Pilots should have runway in sight.

Circling Approach

- 1) From GUMPU or OMKOM, join left downwind at 2 000ft at a speed of not more than 160kt. Passing abeam south-end of the runway (THR RWY 03), turn left to over fly the runway. Passing over the north-end of the runway (THR RWY 21), descend from 2 000ft to 1 500ft and turn left for downwind RWY 03. At downwind, descend for a visual approach or as cleared by ATC. Pilots should have the runway in sight.
- 2) From SJ-PONJO-RECHI, overfly the runway at 2 000ft at a speed of not more than 160kt. or as cleared by ATC. When passing over the north-end of the runway (THR RWY 21), descend from 2 000ft to 1 500ft and turn left for downwind RWY 03. At downwind, descend for a visual approach or as cleared by ATC. Pilots should have runway in sight.
- 3) Joining aircraft shall give way to circuit traffic already on downwind.

CAUTION

- a) Pilots are required to keep clear of Sembawang ATZ. Turns should therefore be kept within Seletar CTR.
- b) Pilots should not fly to the east of the runway. This is to keep clear of tall buildings up to 296ft AMSL there. Pilots should have all relevant obstructions in sight, including the steel structure 300ft AMSL and the Silo 342ft AMSL 2nm north of the airfield.
- c)  Minimum altitudes apply over noise abatement areas (WSSL AD 2.21)
Aircraft types which are unable to safely manoeuvre clear of the noise abatement areas are not allowed to operate at Seletar Airport.

PAPI 3.2°		
Pilot's eye height over the threshold when the following PAPI lights come into view	RUNWAY	
	03	21
2 white lights and 2 red lights (MEHT)*	21.24m	17.720m
3 white lights and 1 red light	22.27m	19.286m
4 white lights	24.75m	20.871m

*MEHT : Minimum Eye Height Over the Threshold.

*MEHT : Minimum Eye Height Over the Threshold

Note : Aircraft with eye-to-wheel height greater than 6.3 metres are advised to fly with 2 white and 2 red lights visible so as to achieve sufficient wheel clearance.

Intentionally Left Blank