

INSTRUMENT APPROACH CHART - ICAO


AERODROME ELEV 65ft

HEIGHT RELATED TO
THR RWY 20 - 65ft

ATIS Paya Lebar	148.9	
Singapore APP	124.05	
Paya Lebar APP	119.9	298.0
Seletar APP	126.025	
Paya Lebar TWR	118.05	263.1
Ground Control	130.8	296.0

SINGAPORE/
PAYA LEBAR


RNP RWY 20

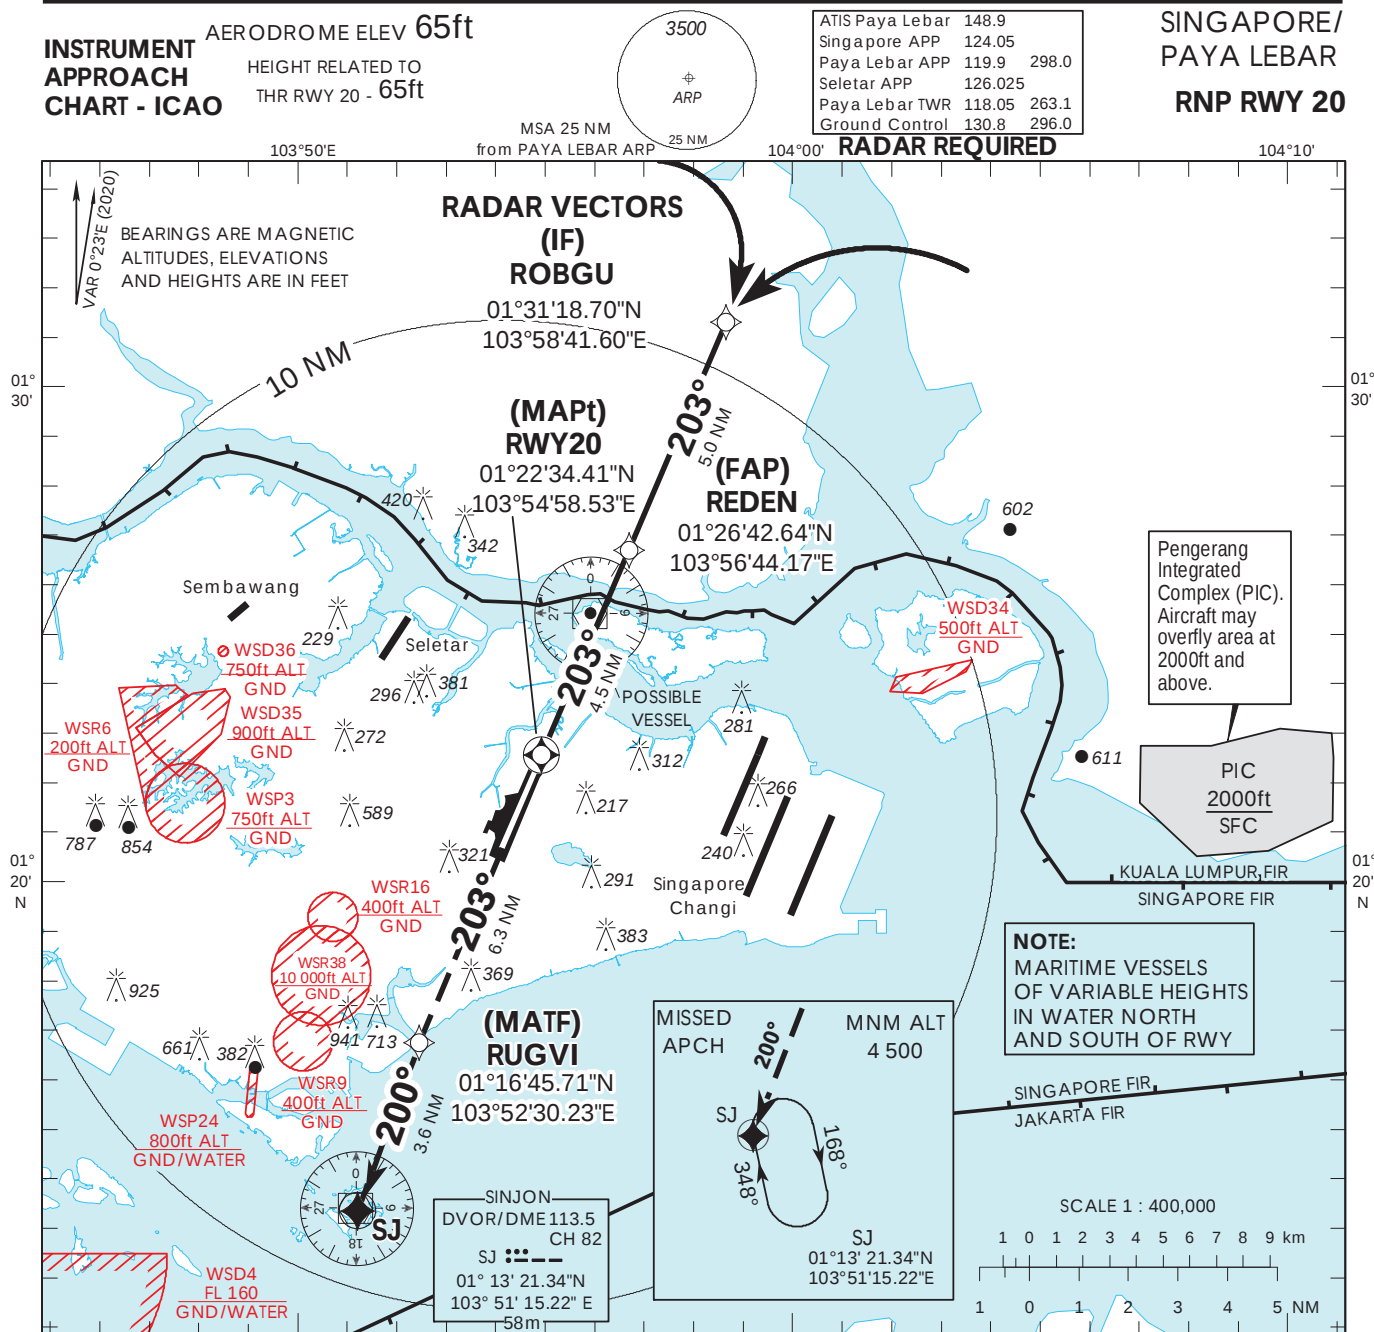

Transition Level : FL 130
Transition Alt : 11 000

MISSED APPROACH:
CLIMB DIRECT TO RUGVI.
TURN LEFT 200° TO SJ TO
JOIN THE HOLDING AT 4500FT
OR ABOVE OR AS DIRECTED BY ATC.

MINIMUM TEMPERATURE
FOR BARO-VNAV
APPROACHES: -23°C

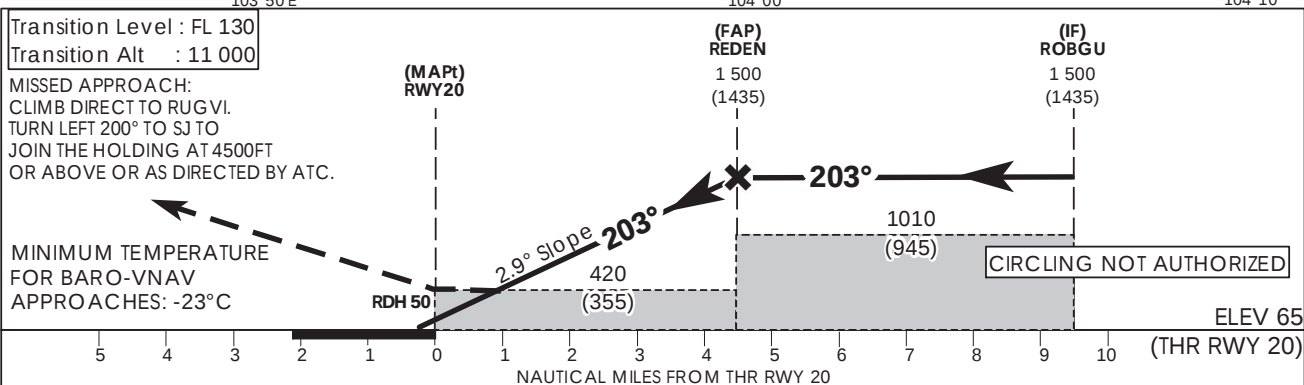

OCA (OCH)									
Category of Aircraft		A		B		C		D	
LNAV/VNAV 2.5%		420 (355)							
LNAV 2.5%		420 (355)							

Fix	ROBGU		REDEN		RWY20		RUGVI		SINJON
Altitude (Height)	1500 (1435)		1500 (1435)		420 (355)		1030 (965)		1580 (1515)
Speed	knots	80	100	120	140	160	180		
FAP - MAPt 4.5 nm	min : s	3 : 23	2 : 42	2 : 15	1 : 56	1 : 41	1 : 30		
Rate of descent/GS	ft/min	410	513	615	718	821	923		